



DIRIS A-10

Multifunction meters - PMD
modular multifunction meter

Single-circuit metering,
measurement &
analysis



DIRIS A-10

Function

The **DIRIS A-10** is a modular multifunction meter for measuring electrical values in low voltage networks.

It allows all electrical parameters to be displayed and utilized for communication and/or output functions.

Advantages

Easy to use

Five direct access pushbuttons enable all measurements to be clearly viewed on the backlit LCD display.

Integrated temperature sensor

It allows variations in temperature to be detected.


Detects wiring errors

An integrated test function can be utilized to detect incorrect wiring and to automatically correct CT installation errors.

Compliant with ANSI C12.20 and IEC 61557-12

IEC 61557-12 is a high-level standard for all PMDs (Performance Monitoring Devices) that are designed to measure and monitor electrical parameters in distribution networks. Compliance with IEC 61557-12 ensures a high level of equipment performance, in terms of metrology, as well as mechanical and environmental aspects (EMC, temperature, etc.).

Principle diagram

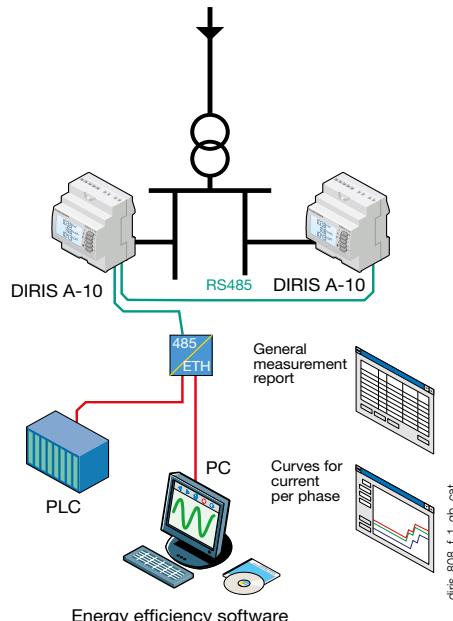

The solution for

- Industry
- Infrastructures
- Building



Strong points

- Easy to use
- Integrated temperature sensor
- Detects wiring errors
- Compliant with ANSI C12.20 and IEC 61557-12

Conformity to standards

- UL E257746
- ANSI C12.20
- IEC 61557-12
- IEC 62053-22 class 0.5S
- IEC 62053-23 class 2



Functions

Multi-measurement

- Currents
 - instantaneous: I_1, I_2, I_3, I_n
 - maximum average: I_1, I_2, I_3, I_n
- Voltages & frequency
 - instantaneous: $V_1, V_2, V_3, U_{12}, U_{23}, U_{31}, F$
- Power
 - instantaneous: $3P, \Sigma P, 3Q, \Sigma Q, 3S, \Sigma S$
 - maximum average: $\Sigma P, \Sigma Q, \Sigma S$
- Power factors
 - instantaneous: $3PF, \Sigma PF$

Metering

- Active energy: $+/-. kWh$
- Reactive energy: $+/-. kVArh$
- Hours: \odot

Harmonic analysis

- Total harmonic distortion (level 51)
 - Currents: $thd I_1, thd I_2, thd I_3$
 - Phase-to-neutral voltage: $thd V_1, thd V_2, thd V_3$
 - Phase-to-phase voltage: $thd U_{12}, thd U_{23}, thd U_{31}$

Dual tariff function

Selection of one out of 2 billing tariffs

Events

Alarms on all electrical values

Communications⁽¹⁾

RS485 with MODBUS protocol

Input


- Tariff selection
- Remote device status

Output

- Remote command of device
- Alarm report
- Pulse report


⁽¹⁾ Available on specific version (see the following pages).

Front panel

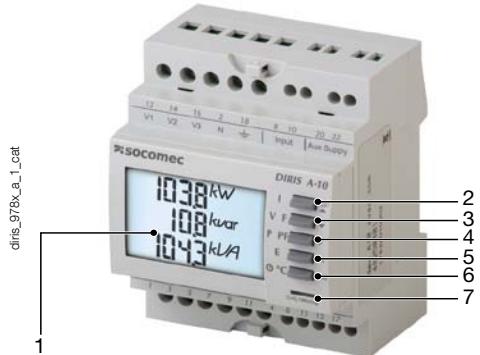

1. Backlit LCD display.
2. Direct access key for currents (instant and maximum), current THD and test function.
3. Direct access key for voltages, frequency and voltage THD.
4. Direct access key for active, reactive and apparent power (instantaneous and max. values) and power factor.
5. Direct access key for energies.
6. Pushbutton for hour meter, temperature and programming menu access.
7. Metrological LED.

Dimensions (in/mm)

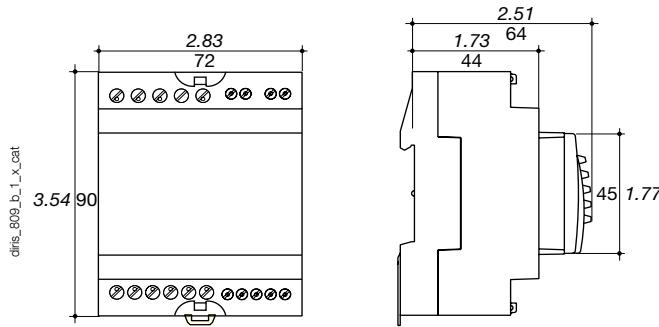

Type	modular
Number of modules	4
Dimensions W x H x D	2.83 x 3.54 x 2.51 in / 72 x 90 x 64 mm
Case degree of protection	IP 30
Front degree of protection	IP 52
Display type	backlit LCD display
Voltage and current connection cross-section	AWG 6 / 4 mm ²
Connection cross-section for AUX supply, input, output and comms.	AWG 10 / 2.5 mm ²
Weight	7.23 oz / 205 g (4825 0400) 7.58 oz / 215 g (4825 0401)

Electrical characteristics

Current measurement (TRMS)	
Via CT primary	9 999 A
Via CT secondary	5 A
Measurement range	0 ... 11 kA
Input consumption	0.6 VA
Measurement updating period	1 s
Accuracy	0.2 %
Permanent overload	6 A
Intermittent overload	10 I _n for 1 s
Voltage measurements (TRMS)	
Direct measurement between phases	50 ... 500 VAC
Direct measurement between phase and neutral	28 ... 289 VAC
Input consumption	≤ 0.1 VA
Measurement updating period	1 s
Accuracy	0.2 %
Power measurement	
Measurement updating period	1 s
Accuracy	0.5 %
Power factor measurement	
Measurement updating period	1 s
Accuracy	0.5 %
Frequency measurement	
Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Accuracy	0.1 %

Energy accuracy	
Active (according to IEC 62053-22)	Class 0.5 S
Reactive (according to IEC 62053-23)	Class 2
Auxiliary power supply	
Alternating voltage	110 ... 277 VAC
AC tolerance	± 15 %
Frequency	50 / 60 Hz
Consumption	< 3 VA
Digital output (pulses or on/off)	
Number	1
Type	20 / 30 VDC - 0.5 A - 10 VA
Max. number of operations	≤ 10 ⁸
Input (tariff)	
Number	1
Type	0 VAC: T1 / 200-277 VAC: T2
Communication	
Link	RS485
Type	2 ... 3 half duplex wires
Protocol	MODBUS RTU
MODBUS® speed	2400 ... 38400 bauds
Operating conditions	
Operating temperature	- 10 ... + 55 °C / +14 °F ... +131 °F
Storage temperature	- 20 ... + 70 °C / -4 °F ... +158 °F
Relative humidity	85 %

DIRIS A-10

Multifunction meters - PMD
modular multifunction meter


Connection

Recommendation:


- For IT earthing systems, it is recommended that the CT secondary is not connected to earth.
- When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PTI: please consult us.
- It is recommended that the earthing point for the DIRIS A-10 and the current transformer secondaries are not earthed at the same time.

Low voltage balanced network


3/4 wires with 1 CT

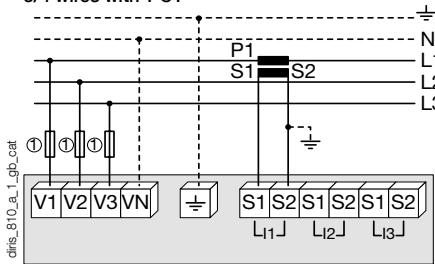

Single-phase

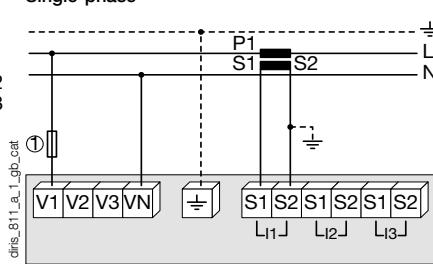


Two-phase

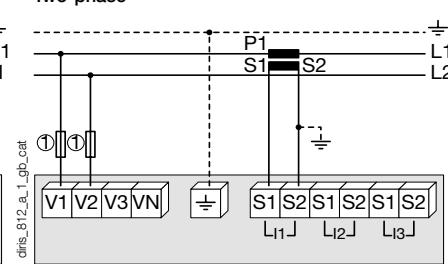


Low voltage unbalanced network


3/4 wires with 3 CTs

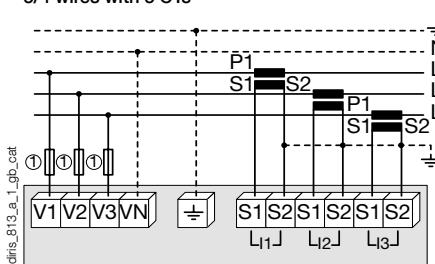

3 wires with 2 CTs

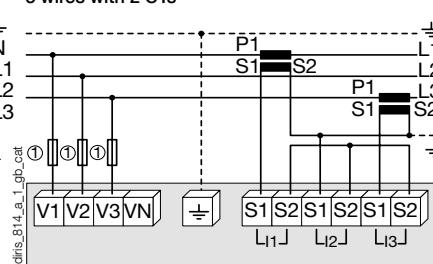


3 wires with 2 CTs

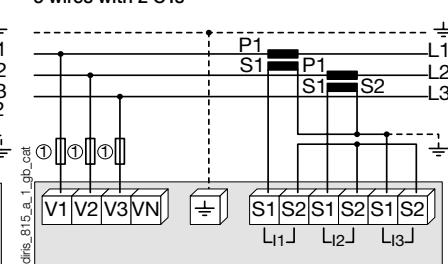

Additional information


Communication via RS485 link

diris_820_a_1_x_cat

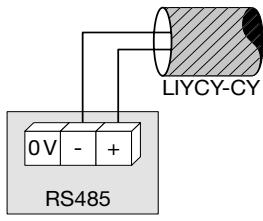


AC auxiliary power supply

diris_821_a_1_x_cat



1. Fuses 0.5 A gG / 0.5 A class CC.


Terminals

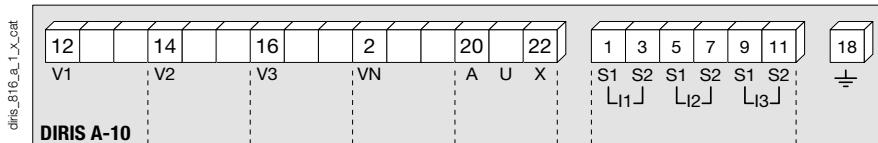

AUX: auxiliary power supply U.
V1, V2, V3 & VN: voltage inputs.

S1 - S2: current inputs.


Communication terminals

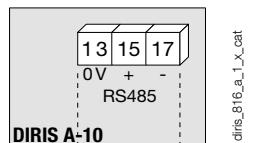

RS485 link.

diris_816_a_1_x_cat


Pulse or alarm output terminals

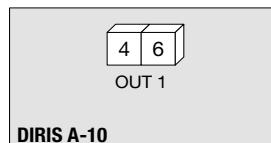

4 - 6: output n°1

diris_819_b_1_x_cat

Input terminals

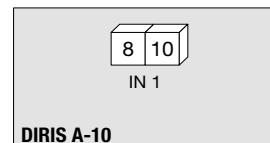

8 - 10: input n°1

diris_818_a_1_x_cat

References

Basic device Description	DIRIS A-10 Reference
DIRIS A-10 with RS485 MODBUS communication	4825 0400
Description of accessories	To be ordered in multiples of Reference
Fuse disconnect switches for the protection of voltage inputs (type RM) 3 poles	4 5701 0018
Fuse disconnect switches for the protection of the auxiliary supply (type RM) 1 pole + neutral	6 5701 0017
Fuses type GG 10x38 0.5 A	10 6012 0000
Range of UL recognized current transformers	1 Consult us
Management software for DIRIS	Consult us