

DIRIS B-30

Meters for measuring and monitoring electrical installations



your energy
our expertise



socomec
Innovative Power Solutions

Monitor your remote measurement points

DIRIS B-30 meters communicate via RS485 Modbus and offer several communication protocols. Measurement and metering data can be displayed on a DIRIS D-30 remote screen or centralized and made available on an Ethernet network using a DIRIS-G communication gateway.

Advantages



Flexible

Multi-circuit

Ability to monitor several circuits thanks to four independent current inputs.

For example, it allows to measure or monitor:

- 1 three-phase load + 1 single-phase load,
- 4 single-phase loads.

Compact

Modular, 3 modules device.



Connected

- Cabled (RS485).
- Multi-protocol: Modbus.
- Remote DIRIS D-30 screen for displaying measurement and metering data.
- Linked to a DIRIS G-30/50 gateway for centralization and communication of data via RS485 to Ethernet.



Accurate

High accuracy of measurements

- Class 0.2 according to ANSI C12.20 for the meter alone.
- Class 0.5 according to IEC 61557-12 from 2% to 120% of rated current range for the full measurement chain (meters associated with TE/TF current sensors).



Plug & Play

Rapid & reliable connection (RJ12) of current sensors

- Automatic detection of ratings and correction of current flow direction.
- Prevents wiring errors, allows disconnection of the current sensor secondary under load.

Auto-configuration

Automatic detection of parameters:

- network type,
- load type,
- device addressing,
- current sensor ratings.



DIRIS B-30
RS485

DIRIS B-009 A



DIRIS D-30
Remote screen

DIRIS D-001 A




Optional module



DIRIS B-30

System

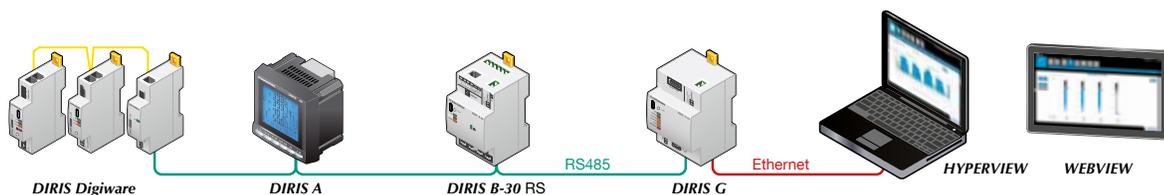

DIRIS B-014 AUS

Associated current sensors *TE*, *TR* and *TF*


A rapid RJ12 connection makes wiring easy and reliable. The accuracy of the global measurement chain is guaranteed according to standard IEC 61557-12:

- class 0.5 with TE or TF current sensors,
- class 1 with TR current sensors.



RJ12 cables with fail-safe mechanisms are available; refer to the relevant pages of the catalogue.

TE Solid current sensors



Suitable for new installations - Match the pitch of protective devices.

	TE-18	TE-25	TE-35	TE-45	TE-55	TE-90
Rated current (A)	5 to 20	25 to 63	40 to 160	63 to 250	160 to 630	400 to 1000
Real range covered (A)	0.1 to 24	0.5 to 75	0.8 to 192	1.26 to 300	3.2 to 756	8 to 1200
Aperture (mm)	Ø 8.4	Ø 8.4	13.5 x 13.5	21 x 21	31 x 31	41 x 41
Dimensions (mm)	28x20x45	28x20x45	25x32.5x65	35x32.5x71	45x32.5x86	55x32.5x100
Connection	RJ12	RJ12	RJ12	RJ12	RJ12	RJ12
References	4829 0500	4829 0501	4829 0502	4829 0503	4829 0504	4829 0505

For loads greater than 1000 A, use the 5 A/RJ12 adapter associated with 5A secondary CTs.


Staggered assembly



Linear assembly



TR Split-core current sensors



Suitable for existing installations.


	TR-10	TR-16	TR-24	TR-36
Rated current (A)	25 to 75	32 to 100	63 to 200	200 to 600
Real range covered (A)	0.5 to 90	0.64 to 120	1.26 to 200	4 to 720
Diameter (mm)	Ø 10	Ø 16	Ø 24	Ø 36
Dimensions (mm)	25x39x71	30x42x74	45x44x95	57x42x111
Connection	RJ12	RJ12	RJ12	RJ12
References	4829 0551	4829 0552	4829 0553	4829 0554

For loads greater than 600 A, use the the 5 A/RJ12 adapter associated with 5A secondary CTs.

TR Split-core current sensors



TF Flexible (Rogowski) current sensors



Suitable for existing installations with space restrictions or with high-intensity currents.

	TF-55	TF-120	TF-300
Rated current (A)	150 to 600	500 to 2000	1600 to 6000
Real range covered (A)	3 to 720	10 to 2400	32 to 7200
Diameter (mm)	Ø 55	Ø 120	Ø 300
Connection	RJ12	RJ12	RJ12
References	4829 0570	4829 0571	4829 0572

TF Flexible current sensors



Selection guide

	DIRIS B-30 RS485
Multi-measurement	
Currents, voltages (ph/ph and ph/n), active/reactive/apparent powers, power factor, frequency	•
Voltage/current unbalance	•
Power factor, cos Phi, tan Phi	•
Metering	
kWh (+/-), kvarh (+/-), kVAh	•
Multi-tariff	•
Load curves	•
Quality analysis	
THDV, THDU, THDI	•
Individual harmonics V, U & I (up to rank 63)	•
Voltage dips, cut-offs and surges (EN50160)	•
Overcurrents	•
Alarms	•
Communication	
RS485 Modbus	•
2 inputs (status/pulse)	•
References	4829 0000

OPTIONAL MODULES ⁽¹⁾	
2 inputs/2 outputs, digital	4829 0030
2 inputs/2 outputs, analogue, 4-20 mA	4829 0031
3 temperature inputs, PT100/PT1000	4829 0032

DISPLAY	
DIRIS D-30 single-point display	4829 0200

(1) Up to 4 optional modules per meter.

Socomec worldwide

NORTH AMERICA

USA, CANADA & MEXICO

Critical Power / Power Control & Safety /
Energy Efficiency

222 Third Street - Suite 1221
Cambridge, MA 02142 USA
Tel. 617 245 0447
Fax 617 245 0437
info.us@socomec.com

IN EUROPE

BELGIUM

Critical Power / Power Control & Safety /
Energy Efficiency

info.be@socomec.com

FRANCE

Critical Power / Power Control & Safety /
Energy Efficiency

dcm.ups.fr@socomec.com

GERMANY

Critical Power

info.ups.de@socomec.com

Power Control & Safety / Energy Efficiency

info.scp.de@socomec.com

ITALY

Critical Power

info.ups.it@socomec.com

Power Control & Safety / Energy Efficiency

info.scp.it@socomec.com

NETHERLANDS

Critical Power / Power Control & Safety /
Energy Efficiency

info.nl@socomec.com

POLAND

Critical Power

info.ups.pl@socomec.com

Power Control & Safety / Energy Efficiency

info.scp.pl@socomec.com

PORTUGAL

Critical Power / Power Control & Safety /
Energy Efficiency

info.ups.pt@socomec.com

ROMANIA

Critical Power / Power Control & Safety /
Energy Efficiency

info.ro@socomec.com

SLOVENIA

Critical Power / Power Control & Safety /
Energy Efficiency

info.si@socomec.com

SPAIN

Critical Power / Power Control & Safety /
Energy Efficiency

info.es@socomec.com

SWITZERLAND

Critical Power

info@socomec.ch

TURKEY

Critical Power / Power Control & Safety /
Energy Efficiency

info.tr@socomec.com

UNITED KINGDOM

Critical Power / Power Control & Safety /
Energy Efficiency

info.uk@socomec.com

IN ASIA PACIFIC

AUSTRALIA

Critical Power / Power Control & Safety /
Energy Efficiency

info.ups.au@socomec.com

CHINA

Critical Power / Power Control & Safety /
Energy Efficiency

info.cn@socomec.com

INDIA

Critical Power / Power Control & Safety /
Energy Efficiency

info.in@socomec.com

SINGAPORE

Critical Power / Power Control & Safety /
Energy Efficiency

info.sg@socomec.com

THAILAND

Critical Power

info.ups.th@socomec.com

IN MIDDLE EAST

UNITED ARAB EMIRATES

Critical Power / Power Control & Safety /
Energy Efficiency

info.ae@socomec.com

OTHER COUNTRIES

NORTH AFRICA

Algeria / Morocco / Tunisia

info.naf@socomec.com

AFRICA

Other countries

info.africa@socomec.com

SOUTH EUROPE

Cyprus / Greece / Israel / Malta

info.se@socomec.com

SOUTH AMERICA

info.es@socomec.com

MORE DETAILS

www.socomec.us/worldwide

HEAD OFFICE

SOCOMECH GROUP

SAS SOCOMECH capital 10 678 740 €
R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse
F-67235 Benfeld Cedex - FRANCE
Tel. +33 3 88 57 41 41
Fax +33 3 88 74 08 00
info.scp.isd@socomec.com

YOUR DISTRIBUTOR / PARTNER

www.socomec.us

your energy
our expertise

